

## Leverantör


Tillverkare <b>WATCHGUARD</b>	Modell FIREBOX CORE X750	Teknisk kontakt Ulf Sahlin <a href="mailto:ulf.sahlin@fedlogin.com">ulf.sahlin@fedlogin.com</a>
----------------------------------	-----------------------------	---

## Konfiguration

Följande guide är tagen från *WatchGuard System Manager User Guide v10.0*, kapitel 12, sid. 216-236.

Konfigurationsguiden aktiverar autentisering via engångskoder (mha RADIUS).

1. **Säkerhetskopiera** nuvarande brandväggskonfiguration!
2. Klicka på **Policy Manager: Setup > Authentication > Authentication Servers > RADIUS Server** tab:

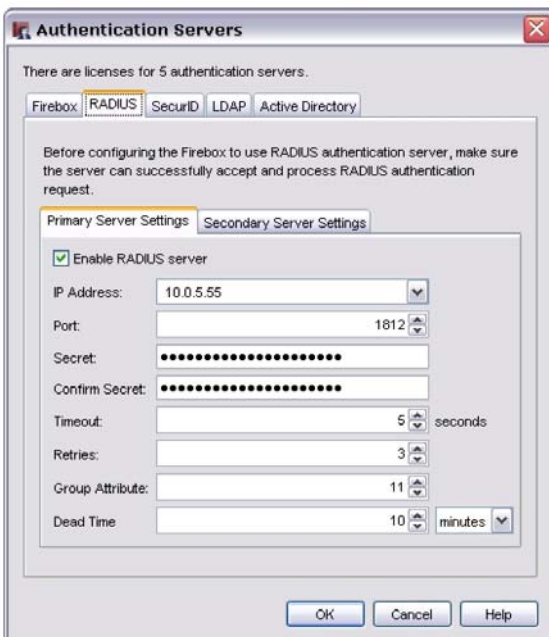

[X] **Enable RADIUS Server**

**IP Address:** **SERVICE.FEDLOGIN.NET** (alt: 213.132.98.162)

**Port:** **1812**

**Secret:** **ENLIGT TJÄNSTESPECIFIKATION "SHARED SECRET"**


**Confirm:** **ENLIGT TJÄNSTESPECIFIKATION "SHARED SECRET"**

**Timeout:** **10 seconds**

**Retries:** **3**

**Group Attribute:** **11**

3. Klicka på **Policy Manager: Setup > Authentication > Authorized Users/Groups**

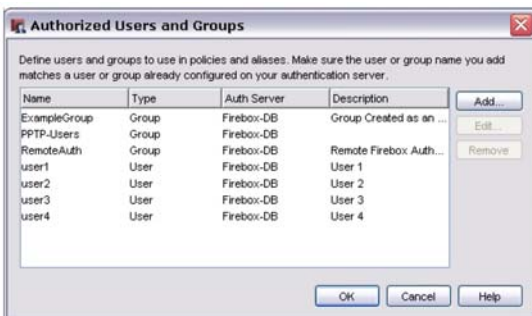

Name	Type	Auth Server	Description
ExampleGroup	Group	Firebox-DB	Group Created as an ...
PPTP-Users	Group	Firebox-DB	
RemoteAuth	Group	Firebox-DB	Remote Firebox Auth...
user1	User	Firebox-DB	User 1
user2	User	Firebox-DB	User 2
user3	User	Firebox-DB	User 3
user4	User	Firebox-DB	User 4

Klicka på **Add...**

**Name:** **fedlogin**

**Description:** **Fedlogin**

**Type:** **Group**

**Auth Server:** **RADIUS**



The dialog box 'Define New Authorized User or Group' contains the following fields and options:

- Name: [Text input field]
- Description: [Text input field]
- Type:  Group  User
- Auth Server: [Dropdown menu with 'Any' selected]
- Buttons: OK, Cancel

#### 4. Autentiseringstest



The WatchGuard authentication page features the WatchGuard logo on the left and a login form on the right:

- Username: [Text input field]
- Password: [Text input field]
- Domain: [Dropdown menu with 'Firebox-DB' selected]
- Buttons: Login, Reset

Öppna en webbläsare och surfa till <https://firebox-extern-ip:4100> (obs port 4100)

**Username:** SE SEPARAT DOKUMENTATION

**Password:** SE SEPARAT DOKUMENTATION

**Domain:** RADIUS

Klicka på **Login**.

5. Lägg till gruppen **fedlogin** i relevanta policies.
6. Skapa en Mobile VPN IPSec-användare (inte PPTP) och anslut.